

DVR-216Q-K1 SERIES TURBO HD DVR



Key Features

Video Input and Transmission

- Self-adaptive HDTV/HD/SD/TV signal input
- Up to 24-ch 6 MP IP cameras input for DVR-216Q-K1
- Long distance transmission over UTP and coaxial cable: max. 800m for 1080p and 1200m for 720p HDTV signal

Compression and Recording

- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 encoding for the main stream, and H.265/H.264 for the sub-stream of analog cameras
- Connectable to H.265+/H.265/H.264+/H.264 IP cameras
- H.265+ can be enabled to improve encoding efficiency and reduce data storage costs
- Up to 4 MP lite resolution for recording

Video Output

- Simultaneous HDMI/VGA output
- HDMI output at up to 4K (3840 × 2160) resolution for DVR-216Q-K1

Storage and Playback

- 1 SATA interface (up to 10 TB capacity per HDD)
- 4/8/16-ch synchronous playback
- Smart search for efficient playback
- Supports the 3rd party cloud storage (Dropbox/Google Drive/Microsoft OneDrive)

Smart Function

- VQD (Video Quality Diagnostics)

Network & Ethernet Access

- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- 1 RJ45 10M/100M/1000M Ethernet network

- Output bandwidth limit configurable


Specifications

Model	DVR-216Q-K1		
Video/Audio input	Video compression	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264	
	Analog video input	16-ch BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection	
	Turbo HD input	4MP, 3 MP, 1080p25, 1080p30, 720p25, 720p30, 720p50, 720p60 Note: The 3 MP signal input is only available for the first channel of DVR-204Q-K1, the first 2 channels of DVR-208Q-K1, and the first 4 channels of DVR-216Q-K1.	
	AHD input	4MP, 1080p25, 1080p30, 720p25, 720p30	
	HDCVI input	4MP, 1080p25, 1080p30, 720p25, 720p30	
	CVBS input	PAL/NTSC	
	IP video input	Up to 6 MP resolution 8-ch (up to 24-ch)	
	Audio compression	G.711u	
Video/Audio output	Audio input/Two-way audio	1-ch, RCA (2.0 Vp-p, 1 KΩ)	
	HDMI/VGA output	HDMI: 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA: 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
	Encoding resolution	When 1080p Lite mode not enabled: 4MP lite/3 MP/1080p/720p/VGA/WD1/4CIF/CIF; When 1080p Lite mode enabled: 1080p lite/720p/VGA/WD1/4CIF/CIF	
	Frame rate	Main stream: When 1080p Lite mode not enabled: For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) For 3 MP stream access: 3 MP/1080p/720p...@15fps For 1080p stream access: 1080p/720p@15fps; VGA/WD1/...@25fps (P)/30fps (N) For 720p stream access: 720p/VGA...@25fps (P)/30fps (N) When 1080p Lite mode enabled: For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p lite/WD1/4CIF/VGA/CIF@25fps (P)/30fps(N) For 3 MP stream access: 3 MP/1080p lite/720p lite/WD1/4CIF/VGA/CIF@15fps For 1080p stream access: 1080p lite/720p lite/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) For 720p stream access: 720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF/2CIF@12fps; CIF/QVGA/QCIF@25fps (P)/30fps (N)	
	Video bit rate	32 Kbps to 6 Mbps	
	Audio output	1-ch, RCA (Linear, 1 KΩ)	
	Audio bit rate	64 Kbps	
	Dual stream	Support	
	Stream type	Video, Video & Audio	
	Synchronous playback	16-ch	
	Remote connections	128	
	Network management	Network protocols	
Hard disk	SATA	1 SATA interface	
	Capacity	Up to 10 TB capacity for each disk	
External interface	Network interface	1, RJ45 10M/100M/1000M self-adaptive Ethernet interface	
	USB interface	Real panel: 2 × USB 2.0	
General	Power supply	12 VDC	
	Consumption (without HDD)	≤ 20 W	
	Working temperature	-10 °C to +55 °C (+14 °F to +131 °F)	
	Working humidity	10% to 90%	
	Dimensions (W × D × H)	260 × 222 × 45 mm (10.2 × 8.7 × 1.8 inch)	
Weight (without HDD)	≤ 1.2 kg (2.6 lb)		

Applicable Models

DVR-216Q-K1

Dimensions

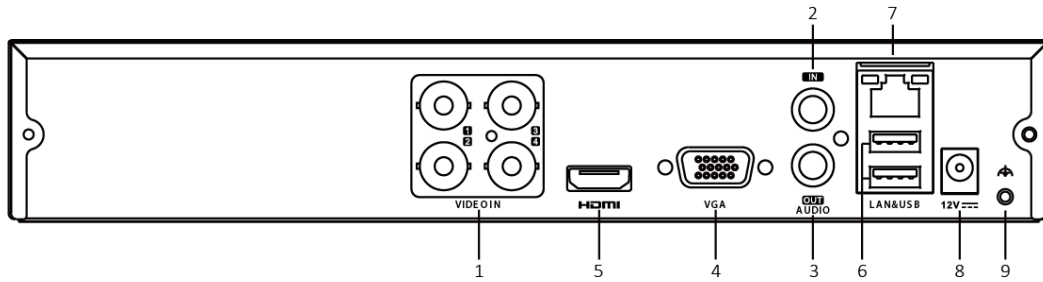

NOTE

The rear panel of DVR-216Q-K1 provides 16 video input interfaces.

Index	Description	Index	Description
1	VIDEO IN	6	USB Interface
2	AUDIO IN	7	Network Interface
3	AUDIO OUT	8	Power Supply
4	VGA	9	GND
5	HDMI		